

Vision is
our mission®

Cable 1m UNI
Article no. 0301960

Cable 1,3m UNI
Article no. 0301440

Cable 2m UNI
Article no. 0301870

Cable 3m UNI
Article no. 0301890

Cable 4m UNI
Article no. 0301450

Cable 5m UNI
Article no. 0301880

Cable 7,5m UNI
Article no. 0301910

Cable 8m UNI
Article no. 0301930

Cable 9m UNI
Article no. 0301950

Cable 11m UNI
Article no. 0301900

Cable 16m UNI
Article no. 0301920

Cable 21m UNI
Article no. 0301940


Cable 40m UNI
Article no. 0301990

2016 • DS0960050 EN A03

Product Data



Dimensions

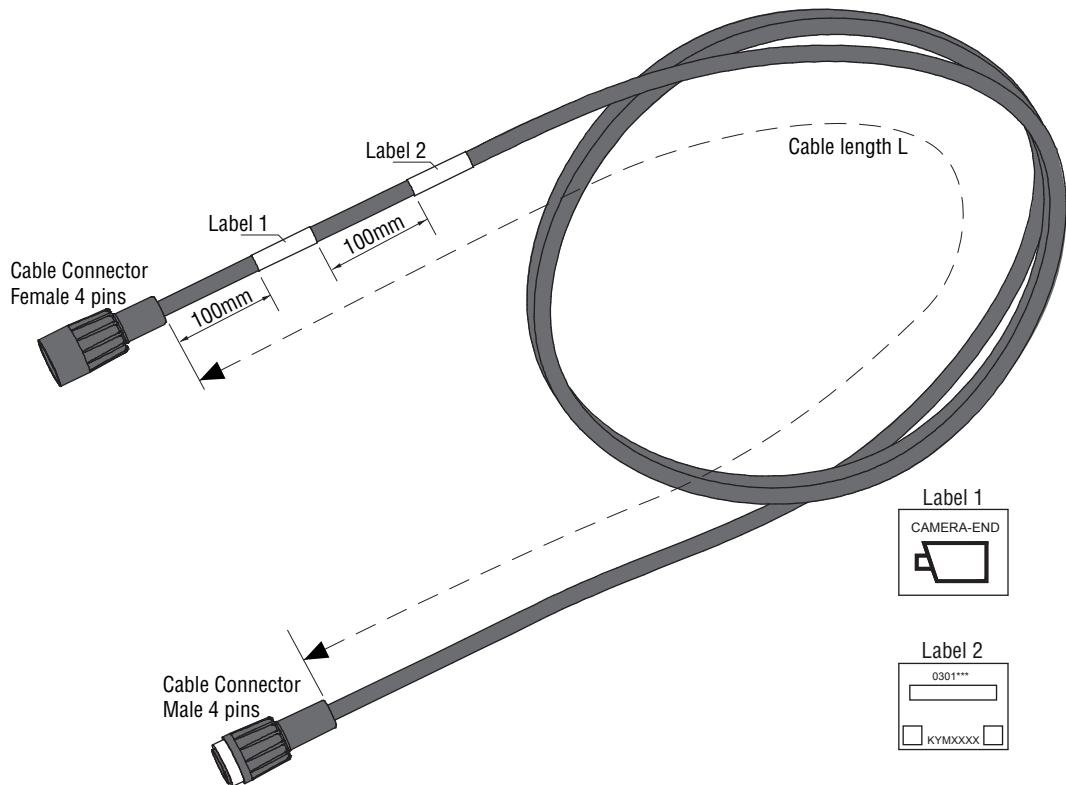


TECHNICAL DATA

Cable *m UNI


	Description						
Cable length	1m	1,3m	2m	3m	4m	5m	
Article number	0301960	0301440	0301870	0301890	0301450	0301880	
Cable length	7,5m	8m	9m	11m	16m	21m	40m
Article number	0301910	0301930	0301950	0301900	0301920	0301940	0301990
Operating temperature	-40°C to +85°C						
Connectors	Cable connector M16 4 pins, molded.						
Protection	IP67 according IEC 60529.						
Cable	Multicable 1 x coax, 2 x power, 1 x data.						
Jacket	Black, PVC						
Bending radius	7,5 mm x diameter (static).						

Electrical connection

- 1 = Coax core = Video signal
- 2 = Coax shielding = Video GND
- 3 = Red = 12V/DC
- 4 = Black = 0V
- Shielding = GND



Front side
female connector



Front side
male connector

All data subject to change without notice. All dimensions are for commercial purpose only.
 The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
 All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

