




PNEUMATIC PISTON GREASE PUMPS STANDARD SERIES

Pneumatic pumps for the dispensing of grease at short and medium distances or for high pressure lubrication.

50:1 Compression ratio

Max outlet pressure **400 bar**


For **16 kg** – pails



Art. no. **4018**

Max outlet pressure **400 bar**

For **18/25 kg** – pails



Art. no. **4020**

Max outlet pressure **400 bar**


For **50 kg** – drums



Art. no. **4060**


Max outlet pressure **400 bar**

For **180 kg** – drums



Art. no. **4080**

Art. no.	4018	4020	4060	4080
Compressed air supply	Pressure min 2 - max 8 bar			
Compression ratio	50:1			
Outlet pressure	400 bar			
Delivery	2900 g/min			
Connection compressed air	1/4" BSP (F)			
Connection lubricant outlet	1/4" BSP (M)			
Max air consumption with 8 bar pressure	78 l/min			
Length suction tube	335 mm	450 mm	750 mm	950 mm
Diameter suction tube	28 mm			
Dimensions LxWxH (mm)	95x95x690	95x95x780	95x95x1005	95x95x1250
Suitable for pails / drums of	16 kg	18 - 25 kg	50 kg	180 kg
Weight	3.8 kg	4.2 kg	5 kg	5.6 kg

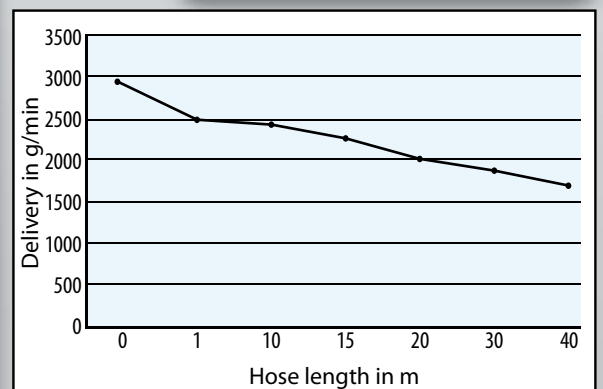

See accessories on pages 30 – 37!

The a. m. performance values are based upon the following test conditions:
lithium grease NLGI 0 at 22°C -- Compressed air pressure 8 bar -- free flow outlet 1/2".