

RELIEF VALVE

TACO NSV-200 SERIES (Rc¹/₄~Rc1)

Diaphragm type



GAUGE ON OPTION


SPECIFICATIONS

FLUID	Filtered Compressed Air, Non-corrosive Gases.
MAX. ALLOWABLE PRESSURE	1.0MPa
AMBIENT TEMPERATURE	5 ~ 60°C
OPERATION	Directly spring operated


MODEL NOS. & OTHER SPECIFICATIONS

Pipe Size	MODEL NUMBER	Adjusting Pressure Range (MPa)	Gauge Port	Mass [kg]
Rc ¹ / ₄	NSV-202	0.02 ~ 0.8	Rc ¹ / ₈ 2 places	1.2
	NSV-202K3	0.02 ~ 0.3		
	NSV-202K1	0.02 ~ 0.1		
Rc ³ / ₈	NSV-203	0.02 ~ 0.8		
	NSV-203K3	0.02 ~ 0.3		
	NSV-203K1	0.02 ~ 0.1		
Rc ¹ / ₂	NSV-204	0.02 ~ 0.8		1.3
	NSV-204K3	0.02 ~ 0.3		
	NSV-204K1	0.02 ~ 0.1		
Rc ³ / ₄	NSV-206	0.02 ~ 0.8		2.8
	NSV-206K3	0.02 ~ 0.3		
	NSV-206K1	0.02 ~ 0.1		
Rc1	NSV-210	0.02 ~ 0.8	2.7	
	NSV-210K3	0.02 ~ 0.3		
	NSV-210K1	0.02 ~ 0.1		

FLOW CHARACTERISTIC CURVE

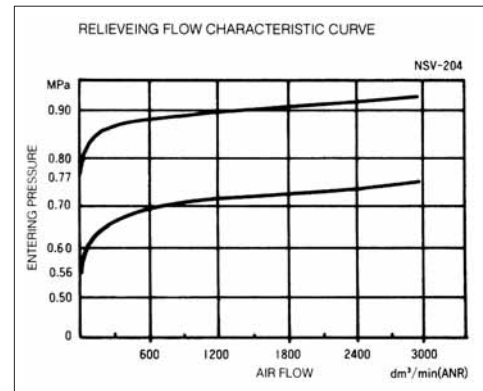

HOW TO ORDER



① Pipe Size

02	Rc ¹ / ₄
03	Rc ³ / ₈
04	Rc ¹ / ₂
06	Rc ³ / ₄
10	Rc1

② Panel mount & adjustment

NIL	T handle (Std.)
P	Panel mount with handwheel

③ Adjusting Pressure Range

NIL	0.02 ~ 0.8MPa
K3	0.02 ~ 0.3MPa
K1	0.02 ~ 0.1MPa

④ Gauge

NIL	Without Gauge (Std.)
T	With Rc ¹ / ₈ center back connection gauge

⑤ Bracket

NIL	Without Bracket (Std.)
B	With Bracket

RELIEF VALVE NSV-200 SERIES

DIMENSIONS -mm-

